


MODEL : MV SERIES

MOBILE ROTAVATOR

MOBILE ROTAVATOR

- ✓ Supports lateral offset movement up to 380 mm, allowing flexible positioning
- ✓ Low noise and low vibration operation reduce operator fatigue during long working hours
- ✓ Optional left and right auxiliary plows enhance overall work efficiency
- ✓ Ideal for orchards, greenhouses, and precision farming environments

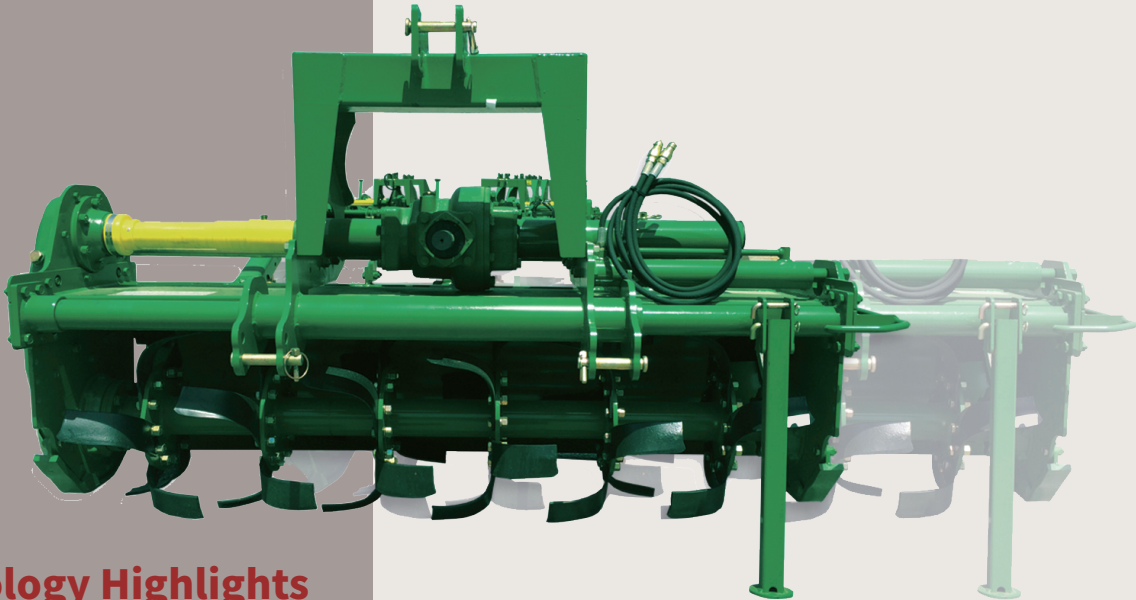

Key Technology Highlights

- ✓ Offset drive structure enables up to 380 mm side movement for improved accessibility
- ✓ Quick switching mechanism allows easy transition between centered and offset operation
- ✓ High-strength hexagonal drive shaft and reinforced rotor pipe minimize twisting and vibration
- ✓ Dual-frame construction with mid-sized gearbox ensures stable power transmission and long-term durability

MODEL			MACHINE SIZE (mm)			Weight	Flanges	Blades	Tilling Width	Tractor		
			Width	Length	Height	(Kg)	(Pcs)	(Pcs)	(mm)	(HP)		
												
WR	1550	MV	1750	840	1050	450	6	36	1550	36~50	RPM	RPM
	1650		1850			460			1650	38~60	540	122
	1750		1950			480	7	42	1750	42~70		
	1850		2050			500			1850	44~80		

* Specifications are subject to change without prior notice.